

- Converts any standard camera or dome video signal to UTP
- Transmit a full motion color or monochrome video signal up to 1200 meters (Active-Active)
- BNC male to quick connect terminal Block
- Built in impedance couple device and noise filter for exceptional interference immunity




TTA111VR



TTA111VT

CONNECTION DIAGRAM

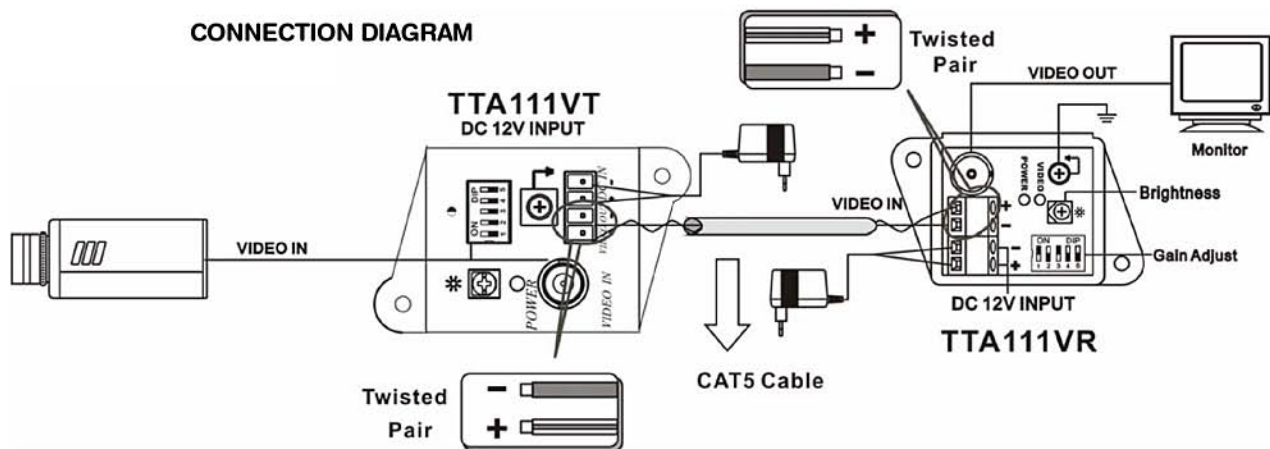

- AP TTA111VR** Active Balun Receiver
- AP TTA111VT** Active Balun Transmitter

These products are designed for long range transmission, the unit built in video amplifier function, if your transmission range under 100 meters, the video gain function is too big to have snow or wavy, bright image occurred. Recommend to use them with range at least over 100 meters or alternate passive video transceivers TTP111 series for short range transmission as well as cost saving.

- Transmit a full motion color or monochrome video signal, color range 1500 meters, B/W video signal up to 2400 meters.
- Video color burst and luminance adjustments at TTA111VT transmitter.
- Five position distance range switch on receiver TTA111VR.
- System is integrated with alarm sensor (PIR, Magnetic, etc.) or data (Pan, Tilt, and Zoom).
- Built in transient protection and ground lifting, damaging voltage spike problems are eliminated.
- Red LED: Power on / off.
- Up to multi pieces TTA111VT transmitter can work with 4 channel Hub TTA414VR or 1U rack mounting TPA008/TPA0008H, TPA016/TPA016H receiver panel

AP TTA111VT	
Video Input	1 Vp-p, 75 Ohms (BNC Connector)
DC INPUT	DC 12V
POWER CONSUMPTION	50mA(max)
COLOR BURST ADJUSTING	Press 1 0~300M Press 2 300~600M Press 3 600~900M Press 4 900~1200M Press 5 1200~1500M
VIDEO GAIN ADJUSTING(LUMINANCE)	100 I.R.E. (MAX)
RECOMMENDED CABLE	CAT-5 UTP Cable 4 pair (24AWG)
DIMENSIONS W x H x D mm	49x42x45
AP TTA111VR	
VIDEO OUTPUT	1Vp-p, 75 Ohms (BNC Connector)
DC INPUT	DC 12V
POWER CONSUMPTION	40mA(max)
VIDEO GAIN ADJUSTING	Press 1 0~300M Press 2 300~600M Press 3 600~900M Press 4 900~1200M Press 5 1200~1500M
RECOMMENDED CABLE	CAT-5 UTP Cable 4 pair (24AWG)
DIMENSIONS W x H x D mm	49x42x45

Specifications may change without a prior notice. All the images on the page are for illustrative purpose only, may not representing actual products. All the rights for the registered trademarks are reserved for their respectable owners. Not responsible for any typographical errors.