

INFRARED DOME CAMERA

Features

- 1/3" Color CCD
- Motion Detection
- Day & Night Function
- Privacy Function
- Upgraded 3AXIS
- 2.8~12mm Auto Varifocal Lens
- Controlled by OSD Menu




Specification

Model	NTSC	PAL
Resolution	560 TV Lines	
Sensor	1/3 inch SONY Super HAD CCD used	
Total Pixels	811(H) x 508(V) 410K pixels(NTSC)	795(H) x 595(V) 470K pixels(PAL)
Effective Pixels	768(H) x 494(V) 380K pixels(NTSC)	752(H) x 582(V) 440K pixels(PAL)
Scanning System	2:1 Interlace	
Synchronization	Internal	
Frequency	Horizontal : 15.734KHz Vertical : 59.94Hz	Horizontal : 15.625KHz Vertical : 50.00Hz
S/N (Y signal)	More than 50 dB (AGC off)	
Video Output	CVBS : 1.0Vp-p / 75ohm	
Min. Illumination	0 Lux at IR On	
White Balance	ATW / AWB / Manual (2,100°K ~ 10,500°K)	
Electronic shutter Speed	Auto / Manual 1/60 sec ~ 1/120,000 sec (NTSC)	Auto / Manual 1/50 sec ~ 1/120,000 sec (PAL)
O.S.D	Built-in	
Backlight Compensation	On/ Off	
Gain Control	On/ Off	
SDNR (Super Digital Noise Reduction)	N/C	
Day & Night	Auto / COLOR / BW	
SYNC	Internal Only	
Motion Detection	ON / OFF (64 Area)	
PRIVACY	ON / OFF (4 Zone)	
MIRROR	ON / OFF	
Operating Temperature / Humidity	-10℃ ~ +50℃ / 30% ~ 80% RH	
Storage Temperature / Humidity	-20℃ ~ +60℃ / 20% ~ 90% RH	
Power Source	DC 12V only AC24V / DC12V Dual Power (optional)	

★ Above specifications may be changed without any notice.


INFRARED DOME CAMERA

DIMENSION

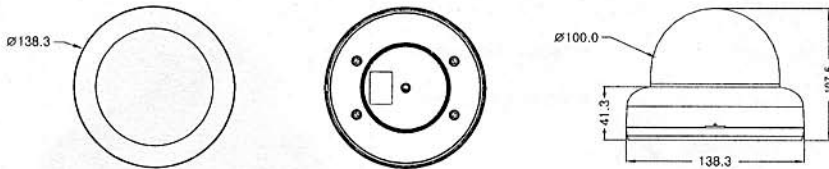


1. Opening


Use the coin wrench to open the cover.

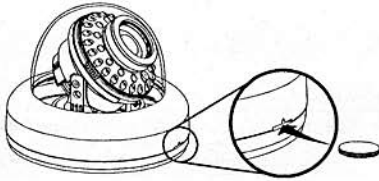


2. Place the camera in the desired location and install using the four screws supplied.



3. Connecting Cables

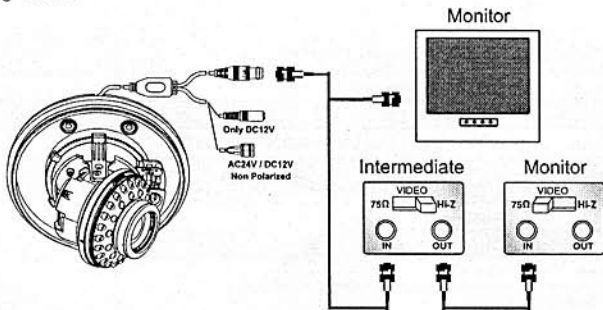

4. Pan/Tilt & Focus Controls

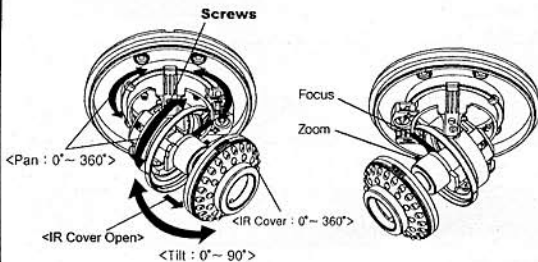

5. Attaching the pad to the base

