

VGA+MOUSE KEYBOARD BALUN

- Max. Distance upto 300ft
VGA + Mouse + Keyboard Balun
- CAT5 / CAT5E / CAT6 / STP or UTP
- No POWER Required (Passive Balun)




- Extend VGA and Keyboard mouse over 2 CAT5 UTP cable to instead of VGA cable and keyboard mouse cable.
- Including local and remote units.
- Up to 100 meters via standard 4 pairs CAT5 STP or UTP cable instead of VGA cable.
- Transmitter built in virtual DDC to avoid improperly setting at resolution and frequency.
- Transmitter built in sync mode selection for signal stability
- Receiver built in sync mode selection for signal stability
- Supports up to 1280 x 1024 pixels.
- Passive device, not support VGA DDC protocol.
- Perfect for classroom, lecture halls, trade shows, video information displays... etc

AP VKM01 VGA + Mouse + Keyboard Balun upto 300ft over CAT5 / CAT5e / CAT6 / STP or UTP Cable

The VGA, Keyboard Mouse CAT5 Extender allows VGA signal and keyboard mouse to be transmitted up to 100 meters (300ft) via 2 x CAT5 STP or UTP cable. Used in pairs, the Extender is used in home or commercial applications as a smart, fast and cost-effective, eliminates costly and bulky VGA, keyboard and mouse cable. Applications for classroom project systems, boardroom systems, collaborative PC systems C-training systems, and trade shows PC demo systems and medical information systems.

CONNECTION DIAGRAM

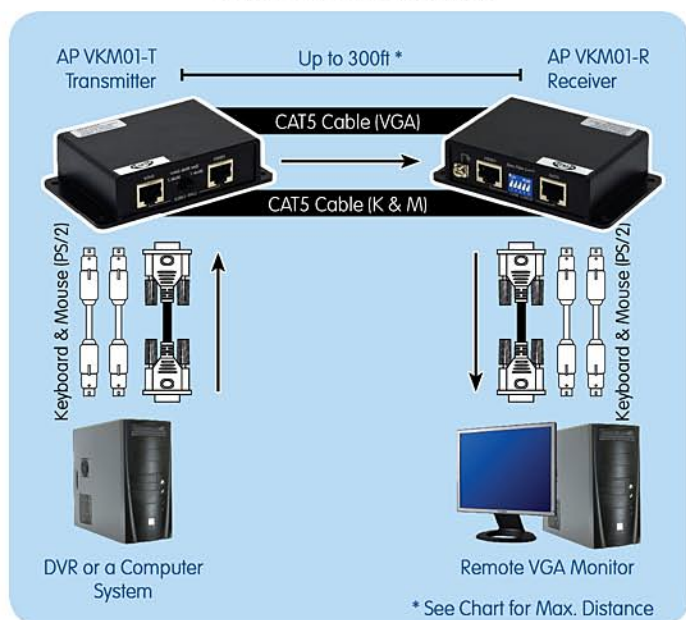

Max. Distance via CAT5 Cable	
640 x 480 Pixel (15Mhz)	300ft
800 x 600 Pixel (30Mhz)	225ft
1024 x 768 Pixel (60Mhz)	180ft
1280 x 1024 Pixel (100Mhz)	100ft

AP VKM01	
Environment	VGA, VESA VP&D 1.0, VP ver 2.0
Devices	VGA monitors, LCD projection screen, Laptops, PCs
Input Signal	Video : 1.1Vp-p Horiz & Vert Sync : TTL standard, 300kHz max. bandwidth
Insertion Loss	Less than 3 dB per pair over the frequency range
Video Signal Return Loss	-15dB max from DC to 60Mhz
RJ45 Pin Configuration	R Video (Red) : Pin 1 (+), Pin 2 (-) Balanced G Video (Green) : Pin 4 (+), Pin 5 (-) Balanced B Video (Blue) : Pin 7 (+), Pin 8 (-) Balanced Horizontal Sync : Pin 3, Vertical Sync : Pin 6
Impedance	Input : RGB 75Ω (DB15HD) Unbalanced Output : RGB 100 Ω (RJ45 shielded) Balanced Horizontal and vertical sync : TTL Standard
Setting Switch	2 Stage Slide Switch - VKMPT 5 stage Dip Switch - VKMPR
Transmission Distance	Up to 100 meters depend on image resolution
Cable for RJ-45	CAT5 UTP or STP Cable
Temperature	Operation : 0 to 55°C, Storage:-20 ~ 85°C, Humidity : up to 95%
Dimensions	108(W)mm x 74(H)mm x 27(D)mm

Specifications may change without a prior notice. All the images on the page are for illustrative purpose only, may not representing actual products. All the rights for the registered trademarks are reserved for their respectable owners. Not responsible for any typographical errors.